


# Temperature Sensor 7132



## Characteristics

- Thermocouple Fe-CuNi (type J); NiCr-Ni (type K)
- RTD Pt100, class B
- Protective tube stainless steel 1.4571 perforated
- Measuring tip plane
- Cable type flexible fiberglass insulation with steel wire braiding or Teflon-Silicon-insulation

## Dimensions

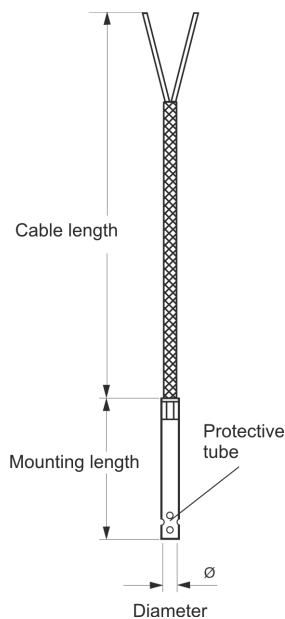

## Ordering code

1.    2.    3.    4.    5.    6.    7.    8.    9.  
 -  -  -  -  -  -  -  -  -

<b>1. Measuring element</b>	7132	Pt100 class B
<b>2. Number of elements</b>	1	
<b>3. Connection type</b>	2L	2-wire
<b>4. Probe diameter</b>	5	5 mm
<b>5. Fitting length EL</b>	50	50 mm
	100	100 mm
	xx	custom length; specify the length in mm in the plain text
<b>6. Cable length (please state in clear text)</b>	2000	Cable length in mm standard
	XXXX	custom length in mm; price/m
<b>7. Operating temperature</b>	400°C	Fiberglass insulation

## Stock

7132-1-2L-5-50-2000-400°C  
 7132-1-2L-5-100-2000-400°C

## Accessories

### Description

Displacement adapter G 1/8  
 incl. nut suitable for  
 protective tube diameter 5 mm

### Ordering code

SV1805