

INDUSTRIAL TEMPERATURE PROBES



GTF 200 Pt100

Art. no. 600017
-50 ... +200°C, Pt100, 4-wire

| Specifications: | |
|-----------------------|---|
| Sensor: | Pt100, DIN cl. B ($\pm 0.3^\circ\text{C}$ at 0°C) |
| Sensor sleeve: | made of stainless steel (1.4571), length 50 mm, diameter 5 mm |
| Cable: | silicone (4×0.14^2), approx. 1 m suitable for 2-/ 3- or 4-wire probe |

GTF 200 Pt100 WD

Art. no. 600020
-20 ... +105°C, Pt100, 4-wire, tube enclosed water proof

| Specifications: | |
|-----------------------|--|
| Sensor: | Pt100, DIN cl. B ($\pm 0.3^\circ\text{C}$ at 0°C) |
| Sensor sleeve: | made of stainless steel |
| Cable: | PVC (4×0.14^2), approx. 1 m suitable for 2-/ 3- or 4-wire probe |



GRO 200 Pt100

Art. no. 600012
Temperature probes


GRO 200 Pt1000

Art. no. 600013
Temperature probes, -50 ... +200°C, DIN class B, 4-wire

GRO 200 K

Art. no. 600011
Temperature probes, -50 ... +200°C, Type K (NiCr-Ni)

| Specifications: | |
|---------------------|---|
| Sensor body: | made of aluminium |
| Probe: | can be mounted with cable clamp or similar constructions to pipes (any diameter) |
| Cable: | silicone, approx. 2 m For faster heat exchange we suggest our heat-conductive paste GWL10G Art. no. 603267 |

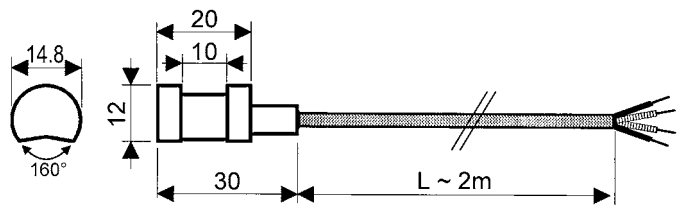

INDUSTRIAL TEMPERATURE PROBES (ATEX 100)



without neck tube, for temperatures $\leq 100^\circ\text{C}$



with neck tube, for temperatures $> 100^\circ\text{C}$


FOR ALL POTENTIALLY EXPLOSIVE ATMOSPHERES OF THE EQUIPMENT-GROUP II WITH THE PROTECTION (I) OR (E)

GTF 101-EX

-200°C ... +100°C (without neck tube)
-200°C ... +900°C (with neck tube)

General:
Readily assembled voltage free temperature probe of stainless steel with connection cable. The sensor inset is not exchangeable. Mounting is done via separate clamping ring fittings GKV.

| Specifications: | |
|---|---|
| Sensors: | Pt100 / Pt1000; mineral insulated element, 4-wire: Measuring ranges: -200°C ... +100°C (600°C - with neck tube), DIN class B Type K; mineral insulated thermocouple: Measuring ranges: -200°C ... +100°C (900°C - with neck tube), class 1 |
| Probe length: | up to 100mm (without upcharge), upcharge per further starting 100 mm |
| Neck tube length: | without upcharge per starting 100 mm |
| Probe diameter: | 3 mm, 4 mm, 5 mm, 6 mm or 8 mm |
| Cable length (4-wire) | |
| Cable: | silicone cable, Surcharge per additional meter of cable PVC, teflon (Pt100/Pt1000 only) |
| Ambient temperature: | -20 ... +60°C (protection type „e“ and protection type „i“ zone 0, 20) or -20 ... +80°C (+60°C) (protection type „i“ zone 1, 2, 21, 22) |
| Type of protection: | „i“: intrinsic safety „e“: increased safety (not for zone 0 and 20) |
| Potentially explosive atmospheres: | suitable for zone 0, zone 1, zone 2, zone 20, zone 21, zone 22 |
| Clamping ring screw connection: | M8x1, M10x1, G1/4" and G1/2" for diameter 3 mm, 6 mm or 8 mm. Please refer to page 85 To determine exact order name ask for our type list. |

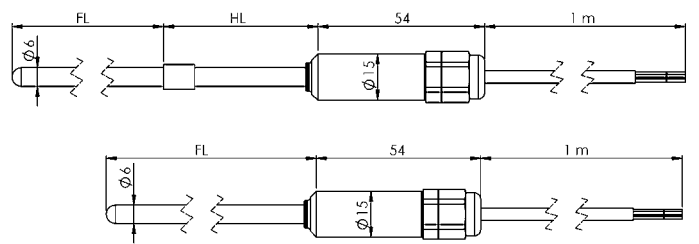

Note: Not all execution options are possible in all zones!