

KCI-Reservoir NFG70



- Top side G1/2 and PG13, 5 connection threads for automated level monitoring, monitoring measurement or filling
- Ventilation element, M12x1,5 thread
- Hose connection 4/6mm for liquid KCI
- Vessel suitable for wall mounting
- Stainless steel fixing screws included
- Stable, durable construction made of polycarbonate PC (container) and PVC-U (connector block)


Characteristics

The KCI-Reservoir is fitted with a G1/2 thread (level monitoring or pressurization the vessel) and a PG13,5 thread (for filling the vessel, for example). For both threads, sealing plugs are included to seal unneeded holes. A third drilling is fitted with a thread M12x1,5mm, in which a ventilation element is screwed in. This element can be removed when the vessel is pressurized.

Technical data

Container	: PC Polycarbonate, crystal clear, colorless, 250ml
Connector block	: PVC-U with mounting holes for 6 mm Screw
O-Ring seals	: EPDM
Hose connection	: PP Polypropylen, Da/di 6/4mm
Operating temperature	: 0..60 °C
Operating pressure	: 6 bar at 20°C, 0,2 bar at 60°C
Pressure port	: 1x female thread G1/2 (with sealing plug)
Sensor connection	: 1x female thread PG13,5 (with sealing plug)
Ventilation element	: 1x female thread M12x1,5 mm

Dimensions

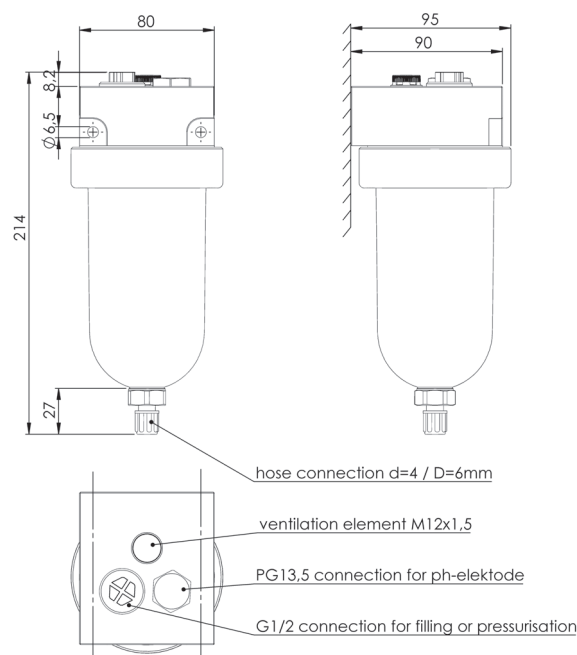

Ordering code

KCI reservoir: NFG

1.	2.	3.	4.	5.	6.
70	1	1	1	1	

1.	Type
70	70 KCL reservoir D=70mm, 250ml
2.	Hose connection
1	Hose connection PP, for hose D/d-6/4mm
3.	Process connection
1	1x PG 13,5 / 1x G1/2 / 1x M12x1,5
4.	Material connector block
1	PVC-U
5.	Material container
1	PC Polycarbonate, crystal clear, colorless
6.	Options
00	without option